Compuload
CL2000 MKII

TOTAL LOAD

CURRENT LOAD

 # 8

Compuload
On Board Weighing Systems

7900 Kg

980 Kg

PRINTER   ZERO   ADD   CLEAR   MENU

Compact Static Weighing System for Forklifts, Tractors, Skid Steer and Small Loader

Compuload
On Board Weighing Systems

- Compact Easy to read 4.3" display
- Accurate weighing of every lift
- Accumulation of every load
- Can weigh in Kg, t, or Lbs
- Bucket / Load counter
- Able to fit optional printer
- Print Copy Function
- -40°C to +75°C operating temperature range
- Ip 65 rated

Optional:
- On Board Printer with time, date, every load and accumulated Total
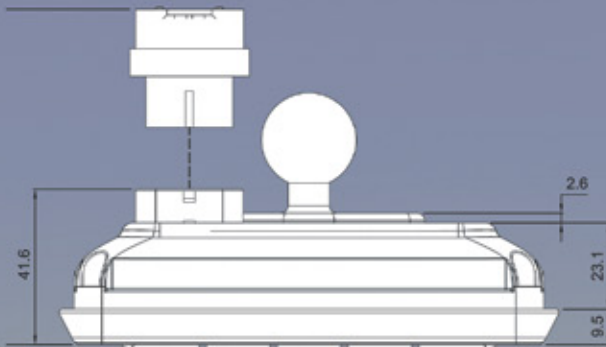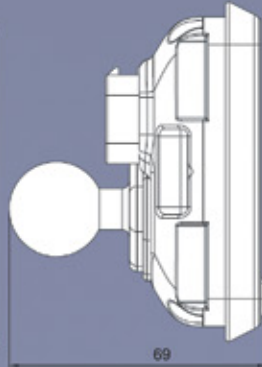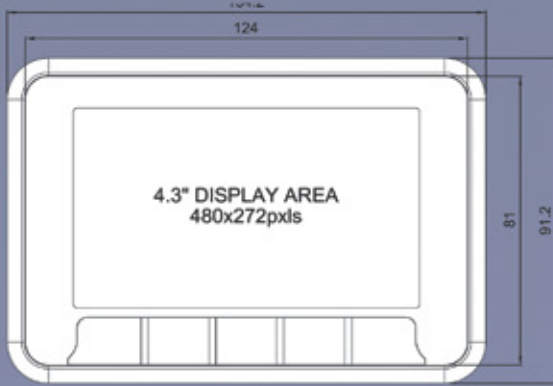
Proven Rugged & Reliable

Compuload weighing systems have proven themselves in all types of applications and environments since 1989. Compuload has 1000's of satisfied users. The rugged design ensures continuous operation even when the going gets tough.
After continuous development, we now introduce the Compuload CL2000MKII.
It is simple to operate and provides reliable and accurate readings.

Compuload CL2000MKII

Compact Weighing System for Forklifts, Tractors, Skid Steer and small Loaders

The Compuload CL2000MKII is a general purpose programmable 4.3" display.
Compact and modern looking. It can be used indoors or outdoors, rated at IP65.

4.3" DISPLAY AREA
480x272pxls

Optional CL4070 Printer

Compuload
On Board Weighing Systems

FOR ALL COMPULOAD SCALES AND SERVICE IN WA

INSTANT WEIGHING
p: (08) 9274 8600
Toll Free: 1800 357 315
m: 0418 914 350
a: 47 Great Eastern Highway
   Bellevue WA, 6056
w: instantweighing.com.au
e: sales@instantweighing.com.au

TECHNICAL SPECIFICATIONS

Power supply	8 - 32V
Operative temperature	- 40°C+ +75°C
Sealing degree	IP65
Display	TFT 4.3", 480 x 272 pixels, 800 cdm, 600:1 contrast ratio
Main CPU	ARM Cortex M4, 32 bit
Frequency	180 Mhz
FLASH Memory	16MB
RAM Memory	16MB
Sun readability	Yes
RTC	Yes
Wake up mode	Power supply, CAN message
Boot time	< 3 sec
Internal temperature sensor	Yes
Keypad	5 push buttons on front panel (silicon keypad)
Touch	Resistive
Buzzer	85 Db
Communication ports	- 2 CAN BUS - 1 USB port - 1 RS232 port (TX/RX)
Video input (optional)	1 PAL/NTSC standard input
I/O List (optional)	- 2 analog/digital Inputs - 4 Outputs High Side 2A
Connector	AMP automotive 26 pin
Standards	CE EMC Industrial, automotive
Programming	C, C++ (ARM Gnu, HAL graphic library), VT3 tool